
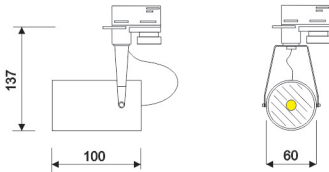



SPOTLIGHTS

LUZ&COLOR 2000

K-60 DIRECTO A RED

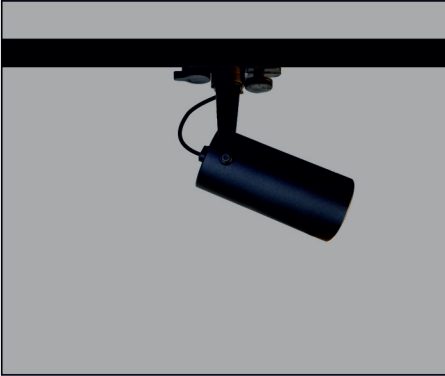

CÓDIGO	W	Lumen	K	CRI	MONTAJE	°
LC-20455-PC-0-27	9	770	2700	>90	PC CARRIL	24°
LC-20456-PC-0-27	9	770	2700	>90	PC CARRIL	36°
LC-20455-PB-0-27	9	770	2700	>90	PB BASE	24°
LC-20456-PB-0-27	9	770	2700	>90	PB BASE	36°
LC-20455-PC-0-30	9	840	3000	>90	PC CARRIL	24°
LC-20456-PC-0-30	9	840	3000	>90	PC CARRIL	36°
LC-20455-PB-0-30	9	840	3000	>90	PB BASE	24°
LC-20456-PB-0-30	9	840	3000	>90	PB BASE	36°




COLORES




SISTEMAS DE REGULACIÓN:



K-60 RÓTULA DIRECTO A RED

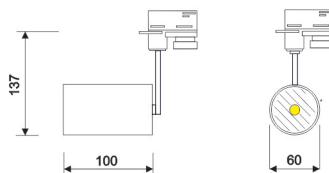


CÓDIGO	W	Lumen	K	CRI	MONTAJE	°
LC-20458-PC-0-27	9	770	2700	>90	PC CARRIL	24°
LC-20459-PC-0-27	9	770	2700	>90	PC CARRIL	36°
LC-20458-PB-0-27	9	770	2700	>90	PB BASE	24°
LC-20459-PB-0-27	9	770	2700	>90	PB BASE	36°
LC-20458-PC-0-30	9	840	3000	>90	PC CARRIL	24°
LC-20459-PC-0-30	9	840	3000	>90	PC CARRIL	36°
LC-20458-PB-0-30	9	840	3000	>90	PB BASE	24°
LC-20459-PB-0-30	9	840	3000	>90	PB BASE	36°



COLORES



SISTEMAS DE REGULACIÓN:



CARRILES: PÁGINAS 130-131